


PH-2380

High Frequency Horn




Features


- 2.0" throat entry
- 90° x 40° nominal coverage
- Cut off frequency 400 Hz

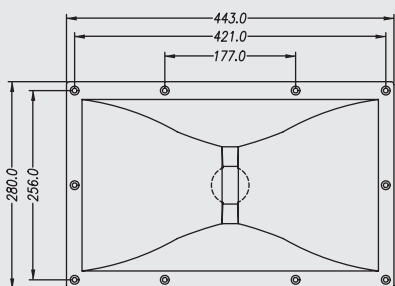


TOP VIEW

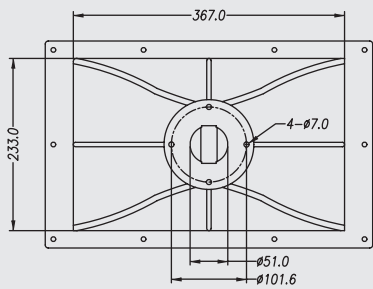

BOTTOM VIEW

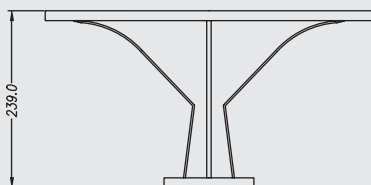

FRONT VIEW



SIDE VIEW

GENERAL SPECIFICATIONS

Throat diameter	50 mm / 2 in
Nominal coverage angle (HxV) -6dB	90° x 40°
Cutoff frequency	400 Hz
Mounting type	Bolt on
Material	Injection polymer A.B.S
Unit weight	2 kg / 4.4 lb
Shipping weight	2.8 kg / 6.1 lb
Packaging dimension WxDxH	465x295x260 mm 18.3x11.6x10.2 in

MOUNTING INFORMATION

Overall Dimensions

Mount Height	280 mm / 11.02 in
Mount Width	445 mm / 17.52 in
Depth	239 mm / 9.41 in


Mounting Dimensions

Rear Height	230 mm / 9.06 in
Rear Width	365 mm / 14.37 in

Baffle Cutout Dimensions

Height	235 mm / 9.25 in
Width	375 mm / 14.76 in

Frequency response and Impedance curve

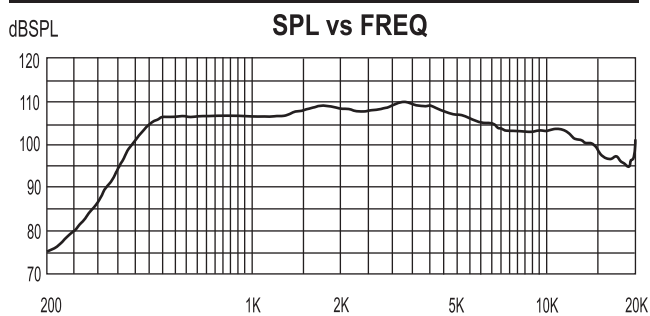

Response of horn with PreNeo-750N



STH PROFESSIONAL AUDIO CO.,LTD.

11/1 AIA Sathorn Tower, 16th floor, unit 1607-1608, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120 | www.paudiothailand.com