PH-2735

High Frequency Horn

Features

- 1.0" throat entry
- 90° x 60° nominal coverage
- Cut off frequency 500 Hz



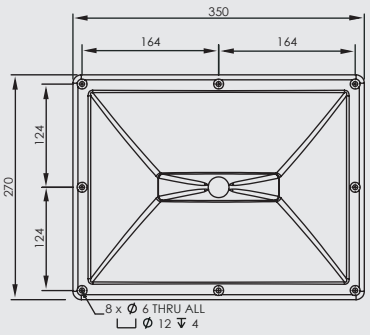

TOP VIEW

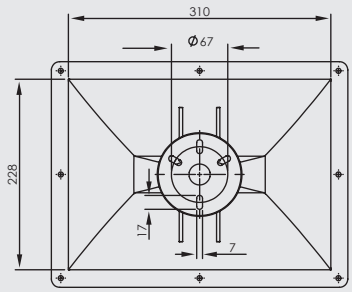

BOTTOM VIEW



FRONT VIEW



SIDE VIEW

GENERAL SPECIFICATIONS

Throat diameter	25 mm / 1 in
Nominal coverage angle (HxV) -6dB	90° x 60°
Cutoff frequency	500 Hz
Mounting type	Bolt on
Material	Injection polymer A.B.S
Unit weight	1.3 kg / 2.87 lb
Shipping weight	1.8 kg / 3.97 lb
Packaging dimension WxDxH	365x285x235 mm
	14.4x11.2x9.3 in

MOUNTING INFORMATION

Overall Dimensions	
Mount Height	270 mm / 10.63 in
Mount Width	350 mm / 13.78 in
Depth	200 mm / 7.87 in
Mounting Dimensions	
Rear Height	227.8 mm / 8.97 in
Rear Width	310 mm / 12.2 in
Baffle Cutout Dimensions	
Height	229 mm / 9.01 in
Width	312 mm / 12.28 in

Frequency response and Impedance curve

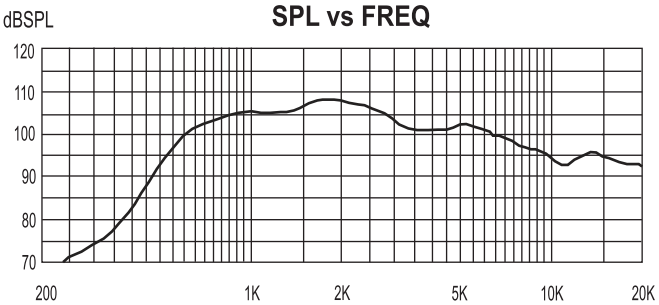

Response of horn with BM-D446

SINCE 1991
STH PROFESSIONAL AUDIO CO.,LTD.
AIA Sathorn Tower, unit 1607, 16th floor, 11/1 South Sathorn Road, Yannawa, Sathorn, Bangkok 10120 (Thailand)| www.paudiothailand.com