




PH-3612

High Frequency Horn



Features

- 1.0" throat entry
- 90° x 40° nominal coverage
- Cut off frequency 1000 Hz

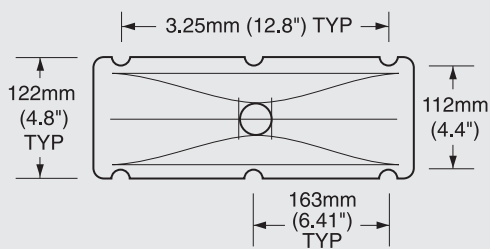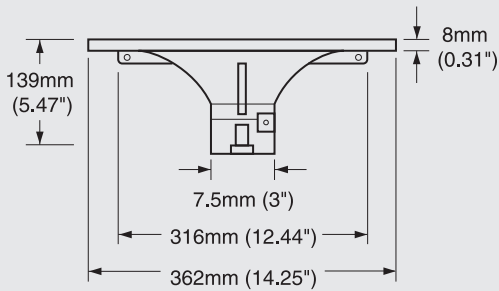

GENERAL SPECIFICATIONS

Throat diameter	25 mm / 1 in
Nominal coverage angle (HxV) -6dB	90° x 40°
Cutoff frequency	1000 Hz
Mounting type	Screw on
Material	Injection polymer A.B.S
Unit weight	1 kg / 2.2 lb
Shipping weight	1.3 kg / 2.9 lb
Packaging dimension WxDxH	380x140x160 mm 15x5.5x6.3 in

MOUNTING INFORMATION

Overall Dimensions

Mount Height	122 mm / 4.80 in
Mount Width	362 mm / 14.25 in
Depth	139 mm / 5.47 in


Mounting Dimensions

Rear Height	100 mm / 3.94 in
Rear Width	316 mm / 12.44 in

Baffle Cutout Dimensions

Height	102 mm / 4.02 in
Width	320 mm / 12.60 in

Frequency response and Impedance curve

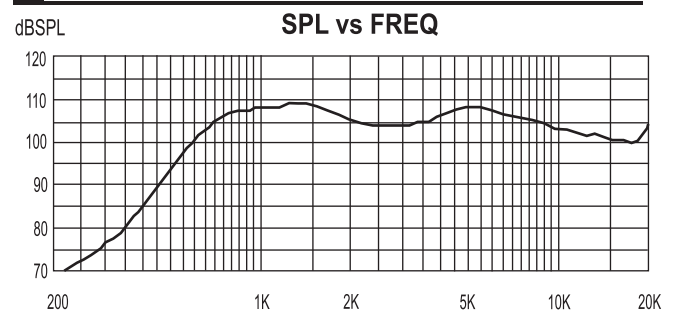

Response of horn with BM-D440S



STH PROFESSIONAL AUDIO CO.,LTD.

AIA Sathorn Tower, unit 1607, 16th floor, 11/1 South Sathorn Road, Yannawa, Sathorn, Bangkok 10120 (Thailand) | www.paudiothailand.com