PH-3713

High Frequency Horn

Features

- 1.0" throat entry
- 90° x 40° nominal coverage
- Cut off frequency 600 Hz

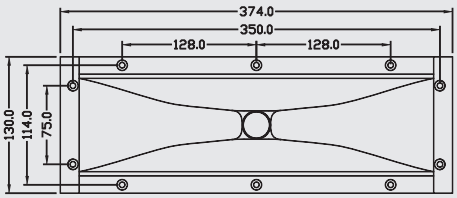

TOP VIEW

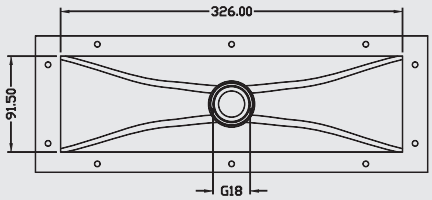

BOTTOM VIEW

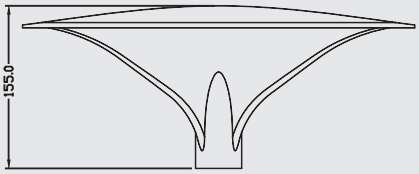

FRONT VIEW



SIDE VIEW

GENERAL SPECIFICATIONS

Throat diameter	25.4 mm / 1 in
Nominal coverage angle (HxV) -6dB	90° x 40°
Cutoff frequency	600 Hz
Mounting type	Screw on
Material	Injection polymer A.B.S
Unit weight	0.45 kg / 0.99 lb
Shipping weight	0.67 kg / 1.48 lb
Packaging dimension WxDxH	380x140x180 mm
	15x5.5x7.1 in

MOUNTING INFORMATION

Overall Dimensions	
Mount Height	130 mm / 5.12 in
Mount Width	374 mm / 14.72 in
Depth	155 mm / 6.10 in
Mounting Dimensions	
Rear Height	90 mm / 3.54 in
Rear Width	326 mm / 12.83 in
Baffle Cutout Dimensions	
Height	95 mm / 2.56 in
Width	330 mm / 12.99 in

Frequency response and Impedance curve

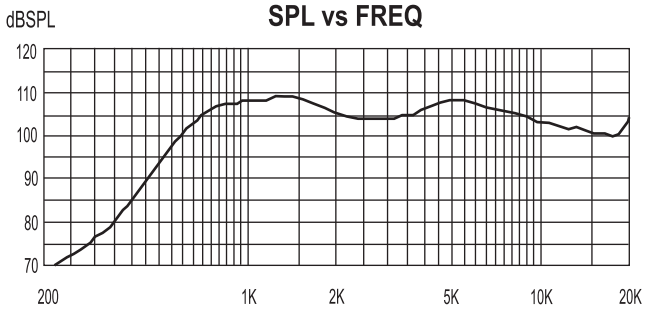

Response of horn with BM-D440S

SINCE 1991
STH PROFESSIONAL AUDIO CO.,LTD.
AIA Sathorn Tower, unit 1607, 16th floor, 11/1 South Sathorn Road, Yannawa, Sathorn, Bangkok 10120 (Thailand)| www.paudiothailand.com