PH-4528

High Frequency Horn

Features

- 2.0" throat entry
- 60° x 40° nominal coverage
- Cut off frequency 400 Hz



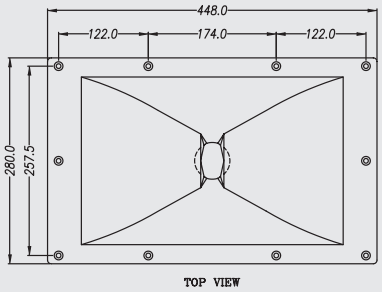

TOP VIEW

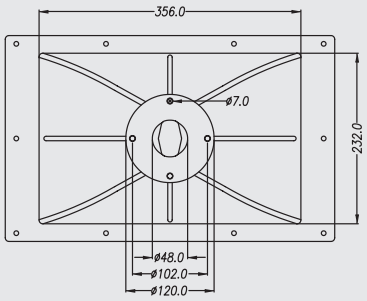

BOTTOM VIEW

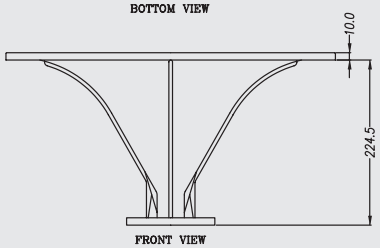

FRONT VIEW



SIDE VIEW

GENERAL SPECIFICATIONS

Throat diameter	50 mm / 2 in
Nominal coverage angle (HxV) -6dB	60° x 40°
Cutoff frequency	400 Hz
Mounting type	Bolt on
Material	Injection polymer A.B.S
Unit weight	2 kg / 4.41 lb
Shipping weight	2.5 kg / 5.51 lb
Packaging dimension WxDxH	465x295x260 mm
	18.3x11.6x10.2 in

MOUNTING INFORMATION

Overall Dimensions	
Mount Height	448 mm / 17.64 in
Mount Width	280 mm / 11.02 in
Depth	235 mm / 9.25 in
Mounting Dimensions	
Rear Height	356 mm / 14.02 in
Rear Width	232 mm / 9.13 in
Baffle Cutout Dimensions	
Height	360 mm / 14.17 in
Width	235 mm / 9.25 in

Frequency response and Impedance curve

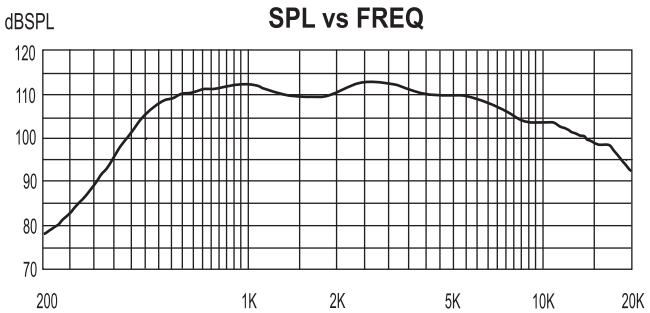

Response of horn with BM-D750

SINCE 1991

STH PROFESSIONAL AUDIO CO.,LTD.

AIA Sathorn Tower, unit 1607-1608, 16th floor, No.11/1, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120