




PHT-416

High Frequency Horn-Drivers




Features


- Small speaker horn driver
- 120 watts peak power handling
- Pure titanium-based 1.0" diaphragm diameter
- Ferrite magnetics

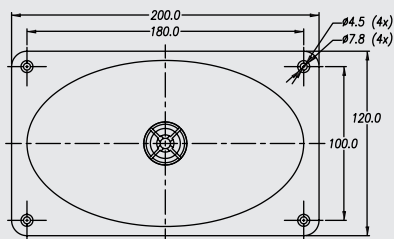


TOP VIEW

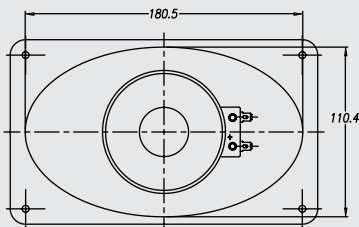

BOTTOM VIEW

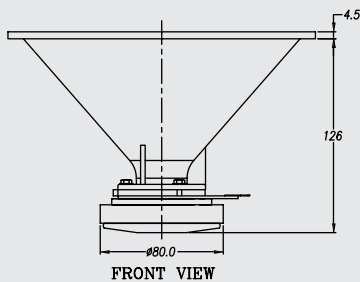

FRONT VIEW



SIDE VIEW


GENERAL SPECIFICATIONS

Diaphragm diameter	25.4 mm / 1 in
Power handling	30 W
Impedance	8 Ohm
Sensitivity (1w/1m)	105 dB
Frequency range	1500 - 16000 Hz
Cutoff frequency	1500 Hz
Nominal coverage angle (HxV) -6dB	90° x 40°
Material	Injection polymer A.B.S
Magnet type	Ferrite
Diaphragm material	Titanium
Baffle cutout dimension	110x180 mm 4.33x7.09 in

SHIPPING INFORMATION

Unit weight	0.72 kg / 1.59 lb
Shipping Weight	0.86 kg / 1.90 lb
Packaging dimension	210x140x145 mm
WxDxH	8.27x5.51x5.71 in

Frequency response and Impedance curve

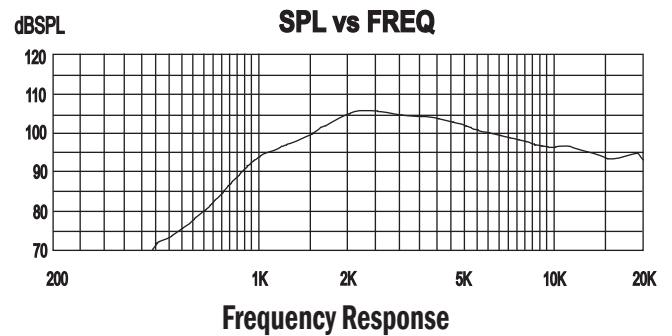

STH PROFESSIONAL AUDIO CO.,LTD.

AIA Sathorn Tower, unit 1607-1608, 16th floor, No.11/1, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120